


## Product Bulletin

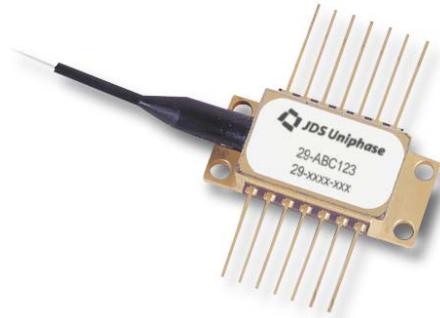

The JDS Uniphase 2900 Series 980 nm pump module utilizes a planar construction with chip on subcarrier. The high power JDS Uniphase laser chip is hermetically sealed in a low-profile, epoxy- and flux-free 14-pin butterfly package and fitted with a thermistor, thermoelectric cooler, and monitor diode. This product uses a polarization maintaining fiber (PMF) pigtail that allows excellent side mode suppression ratios (SMSR) over a very wide dynamic range.

The 2900 Series pump module uses PM fiber Bragg grating stabilization to “lock” the emission wavelength. It provides a noise-free narrowband spectrum, even under changes in temperature, drive current, and optical feedback. Wavelength selection is available for applications that require the highest performance in spectrum control with the highest available powers.

### Up to 500 mW Fiber Bragg Grating Stabilized 980 nm Pump Modules 2900 Series

#### Key Features

- Very high kink-free powers to 500 mW
- Low-profile, epoxy-free, and flux-free 14-pin butterfly planar package with PM fiber
- Fiber Bragg grating stabilization
- Wavelength selection available
- Integrated thermoelectric cooler, thermistor, and monitor diode
- High dynamic range
- Excellent low power stability



#### Applications

- Next generation dense wavelength division multiplexing (DWDM) erbium doped fiber amplifiers (EDFAs) requiring the highest power with “locked” wavelength emission
- Reduced pump-count EDFA architectures
- Very long distance cable television (CATV) trunks and very high node count distribution


#### Compliance

- Telcordia GR-468-CORE
  - 310 mW to 400 mW qualified
  - 420 mW to 500 mW qualification pending (March 2004)

**Dimensions Diagram** (Specifications in mm unless otherwise noted.)

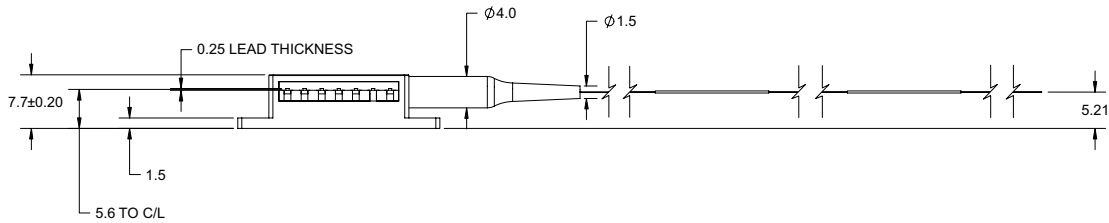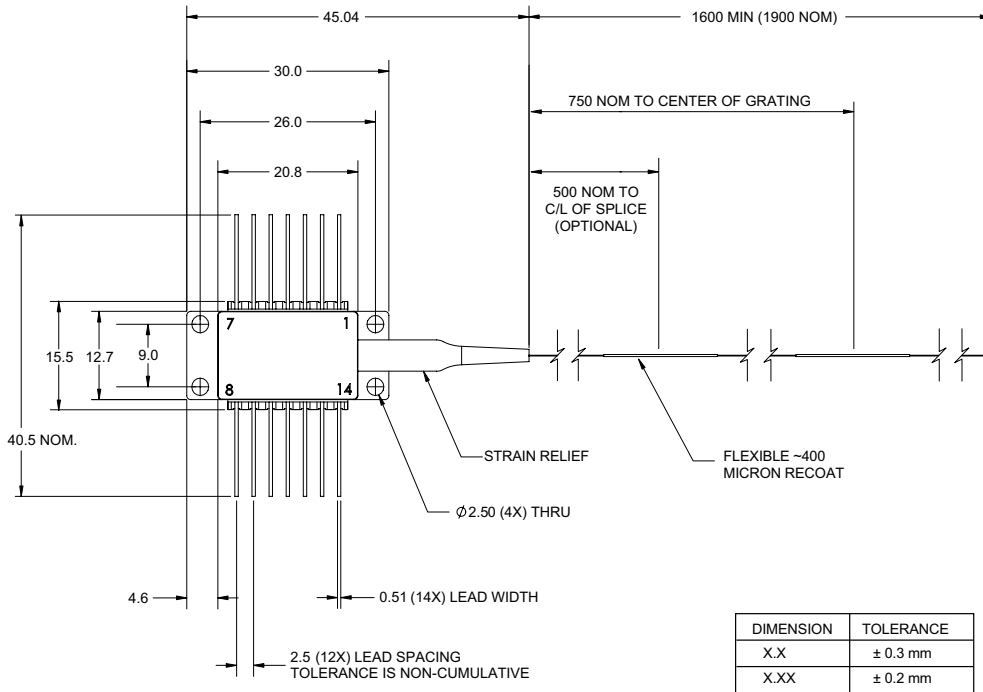

**Pinout**

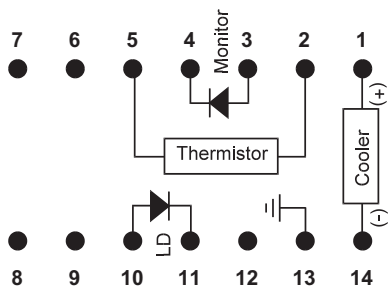

**Pinout**

Pin	Description
1	Cooler (+)
2	Thermistor
3	Monitor PD anode
4	Monitor PD cathode
5	Thermistor
6	N/C
7	N/C
8	N/C
9	N/C
10	Laser anode
11	Laser cathode
12	N/C
13	Case ground
14	Cooler (-)

**Absolute Maximum Ratings**

Parameter	Symbol	Test Condition	Minimum	Maximum
Operating case temperature	$T_{op}$	-	0 °C	75 °C
Storage temperature	$T_{stg}$	2000 hours	-40 °C	85 °C
Laser operating temperature	$T_{LD}$	-	0 °C	50 °C
LD reverse voltage	$V_r$	-	-	2.5 V
LD forward current	$I_{f,max}$	48 hours maximum	-	1100 mA
LD reverse current		-	-	10 $\mu$ A
PD reverse voltage	$V_{PD}$	-	-	20 V
PD forward current	$I_{PF}$	-	-	10 mA
Electrostatic discharge (ESD)	$V_{ESD}$	C = 100 pF, R = 1.5 $\Omega$ , human body model	-	1000 V
Cooler current	$I_c$	-	-	4 A
TEC voltage	$V_c$	-	-	4.5 V
Axial pull force		3 x 10 seconds	-	5 N
Side pull force		3 x 10 seconds	-	2.5 N
Fiber bend radius		-	16 mm	-
Atmospheric pressure		Storage	-	11 kPa
Atmospheric pressure		Operating	-	58 kPa
Relative humidity	RH	Non condensing	5%	95%
Lead soldering time		260 °C	-	10 seconds

Note: Each device is rated to a maximum kink-free current ( $I_{max}$ ), provided on the individual datasheet. This is the maximum current under which the device will perform its intended function. Operation above  $I_{max}$ , and up to the absolute maximum rating, may result in poor device performance, and degrade device reliability. Long-term operation above  $I_{max}$  may lead to early device failure.

**Operating Parameters**

Product Code	Operating Power $P_{op}$ (mW)	Operating Current $I_{op}$ (mA)	Kink-Free Power $P_{max}$ (mW)	Kink-Free Current $I_{max}$ (mA)
29-xxxx-310	280	555	310	615
29-xxxx-320	290	575	320	635
29-xxxx-330	300	595	330	655
29-xxxx-340	310	615	340	680
29-xxxx-350	315	625	350	700
29-xxxx-360	325	645	360	720
29-xxxx-380	340	680	380	760
29-xxxx-400	360	720	400	805
29-xxxx-420	380	760	420	855
29-xxxx-440	400	805	440	910
29-xxxx-460	410	840	460	950
29-xxxx-480	430	875	480	985
29-xxxx-500	450	900	500	1000

## Available Peak Wavelength Selection

Product Code	Peak Wavelength	Peak Wavelength Tolerance
29-7402-xxx	974.0 nm	±1 nm
29-7552-xxx	975.5 nm	±1 nm
29-7602-xxx	976.0 nm	±1 nm
29-7702-xxx	977.0 nm	±1 nm
29-8000-xxx	980.0 nm	-6/+5 nm
29-8052-xxx	980.5 nm	±1 nm

Electro-Optical Performance (BOL,  $T_{case} = 0$  to  $75$  °C,  $P_f$  range = 12 mW to  $P_{max}$ , -50 dB reflection, unless noted otherwise)

Parameter	Symbol	Test Condition	Minimum	Maximum
Threshold current	$I_{th-BOL}$	-	-	30 mA
Laser diode temperature	$T_{LD}$	-	20 °C	30 °C
Forward voltage	$V_f$	$I_f = I_{op}$	-	2.5 V
Operating power	$P_{op}$	$I_f = I_{op}$	12 mW	450 mW
Kinkfree output power	$P_{max}$	$I_f = I_{max}$	310 mW	500 mW
Wavelength	$\lambda_m$	$T_{ambient} = 22 \pm 3$ °C	973 nm	986 nm
Pump in pump band	$P_{pump}$	Pump band = $\lambda_m \pm 1.5$ nm	90%	-
Spectral width	$\Delta\lambda_{RMS}$	-	-	2.0 nm
Wavelength tuning vs. temperature	$\Delta\lambda/T$	-	-	0.02 nm/°C
Optical power stability	-	-	-	0.5%
Relative optical power stability	-	Peak-to-peak, $T = 10$ min, 50 kHz sampling, $T_{case} = 25$ °C $20$ mW < $P$ < $P_{op}$ $12$ mW < $P$ < $20$ mW	- -	4% 10%
Monitor diode responsivity	$I_{BF}$	-	2 $\mu$ A/mW	20 $\mu$ A/mW
TEC cooling capacity	$\Delta_{TEC}$	$I_f = I_{max}$ , $T_{LD} = 25$ °C, see table below	50 °C	-
Thermistor resistance	$R_{th}$	$T_{set} = 25$ °C	9.5 k $\Omega$	10.5 k $\Omega$
Thermistor constant	B	-	3600 K	4200 K

TEC and Total Module Power Consumption (For  $\Delta T = 50$  °C, BOL,  $T_{case} = 75$  °C,  $T_{ld} = 250$  °C unless noted otherwise)

Product Code	TEC Current $I_{max}$ (A)	TEC Voltage $V_{max}$ (V)	TEC Power Consumption $P_{max}$ (W)	Total Module Power Consumption $P_{max}$ (W)
29-xxxx-310	1.35	1.95	2.63	3.80
29-xxxx-320	1.40	2.00	2.80	4.00
29-xxxx-330	1.45	2.20	3.19	4.57
29-xxxx-340	1.45	2.25	3.26	4.70
29-xxxx-350	1.50	2.30	3.45	4.91
29-xxxx-360	1.50	2.30	3.45	4.97
29-xxxx-380	1.60	2.40	3.84	5.40
29-xxxx-400	1.70	2.45	4.17	5.86
29-xxxx-420	1.80	2.60	4.70	6.52
29-xxxx-440	1.85	2.65	4.90	6.82
29-xxxx-460	1.95	2.75	5.36	7.36
29-xxxx-480	2.05	2.85	5.84	7.94
29-xxxx-500	2.10	2.90	6.00	8.20

**Panda PM-980 Polarization Maintaining Fiber Nominal Characteristics and Tolerances**

Parameter	Specification
Cutoff wavelength	950 nm
Maximum attenuation at 980 nm	3.0 dB/km
Cladding outside diameter	125±3 µm
Coating outside diameter	250±3 µm
Mode field diameter at 980 nm	6.6±1.1 µm
Cross talk at 100 m	-25 dBm/2 m
Maximum beat length	3.3 mm
Operating temperature	-40 to 85 °C
Fiber tensile proof strength (tested)	200 kpsi

**Ordering Information**

For more information on this or other products and their availability, please contact your local JDS Uniphase account manager or JDS Uniphase directly at 1-800-498-JDSU (5378) in North America and +800-5378-JDSU worldwide or via e-mail at sales@jdsu.com.

**Sample: 29-7402-310**

**29-**

Code	Peak Wavelength	Code	Minimum Kink-Free Power
7402	973.0 to 975.0 nm	310	310 mW
7552	974.5 to 976.5 nm	320	320 mW
7602	975.0 to 977.0 nm	330	330 mW
7702	976.0 to 978.0 nm	340	340 mW
8000	974.0 to 985.0 nm	350	350 mW
8052	979.5 to 981.5 nm	360	360 mW
		380	380 mW
		400	400 mW
		420	420 mW
		440	440 mW
		460	460 mW
		480	480 mW
		500	500 mW

## User Safety

### Safety and Operating Considerations

The laser light emitted from this laser diode is invisible and may be harmful to the human eye. Avoid looking directly into the fiber when the device is in operation.

**CAUTION: THE USE OF OPTICAL INSTRUMENTS WITH THIS PRODUCT INCREASES EYE HAZARD.**

Operating the laser diode outside of its maximum ratings may cause device failure or a safety hazard. Power supplies used with this component cannot exceed maximum peak optical power.

CW laser diodes may be damaged by excessive drive current or switching transients. When using power supplies, the laser diode should be connected with the main power on and the output voltage at zero. The current should be increased slowly while monitoring the laser diode output power and the drive current. Careful attention to heatsinking and proper mounting of this device is required to ensure specified performance over its operating life. To maximize thermal transfer to the heatsink, the heatsink mounting surface must be flat to within .001” and the mounting screws must be torqued down to 1.5 in.-lb.


**ESD PROTECTION** — Electrostatic discharge (ESD) is the primary cause of unexpected laser diode failure. Take extreme precaution to prevent ESD. Use wrist straps, grounded work surfaces, and rigorous antistatic techniques when handling laser diodes.

## Labeling

### 21 CFR 1040.10 Compliance

Because of the small size of these devices, the output power and laser emission indicator label shown below is attached to the individual shipping container. All labels are illustrated here to comply with 21 CFR 1040.10 as applicable under the Radiations Control for Health and Safety Act of 1968.


#### 14-PIN MODULE LABEL



#### SHIPPING BOX LABEL



#### OUTPUT POWER AND LASER EMISSION INDICATOR LABEL

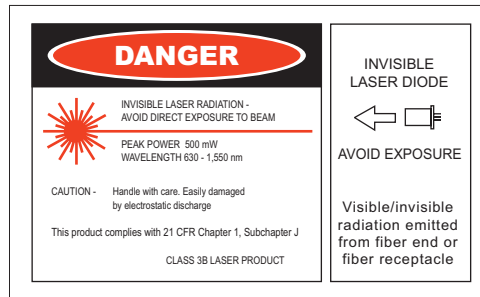

Telcordia is a registered trademark of Telcordia Technologies Incorporated.



North America toll-free: 1-800-498-JDSU (5378)  
 Worldwide toll-free: +800-5378-JDSU  
[www.jdsu.com](http://www.jdsu.com)

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. JDS Uniphase reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDS Uniphase makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDS Uniphase for more information. JDS Uniphase and the JDS Uniphase logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders. Copyright JDS Uniphase Corporation. All rights reserved.  
 10143038 Rev. 004 11/03