

Resource: How to Create Authorization Rules Allowing Services Only to Specific Hosts on the CSACS

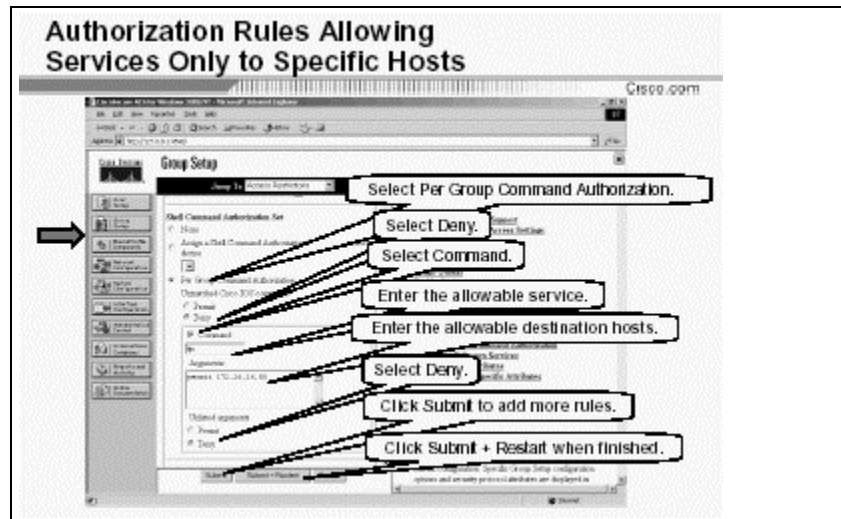


Figure 1

Complete the following steps to add authorization rules for services to specific hosts in CSACS:

Step 1 Click **Group Setup** from the navigation bar. The Group Setup window opens.

Step 2 Scroll down in Group Setup until you find Shell Command Authorization Set.

Step 3 Select **Per Group Command Authorization**.

Step 4 Select **Deny**, which is found under Unmatched Cisco IOS commands.

Step 5 Select the **Command** check box.

Step 6 In the command field, enter one of the following allowable services: ftp, telnet, or http.

Step 7 In the Arguments field, enter the IP addresses of the host that users are authorized to go to. Use the following format:

`permit ip_addr`

(where *ip_addr* = the IP address of the host)

Step 8 Select **Deny**, which is found under Unlisted arguments.

Step 9 Click **Submit** to add more rules, or click **Submit + Restart** when finished.